



Asus ROG Strix GL702VM-BHI7N09 Fan Replacement

This guide explains how to remove the fans of the Asus ROG Strix GL702VM-BHI7N09 for replacement.

Written By: Zach Langer



INTRODUCTION

This guide explains how to remove the fans of the Asus ROG Strix GL702VM-BHI7N09 for replacement. Any of the three fans in the laptop can be replaced following these instructions.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-


Step 1 — Back Panel




- Flip the laptop over to the back panel, with the serial numbers facing up.
- Using a Phillips #1 screwdriver, remove the ten 12 mm screws from the back panel.


Step 2



 The snap seals don't need a lot of pressure to open, and may break if forced. Be gentle with the opening tool.


- Wedge the sharp edge of the plastic opening tool into the seam between the back panel and the rest of the laptop, then gently pry the panel up.
-  There will be a snapping sound as you remove the back panel, but that is just the seal loosening.
- Continue breaking the seals by sliding the plastic opening tool around the entire laptop under the seam until the back panel is free.
- Once you have broken all the seals, carefully lift the panel off.

Step 3 — Fan

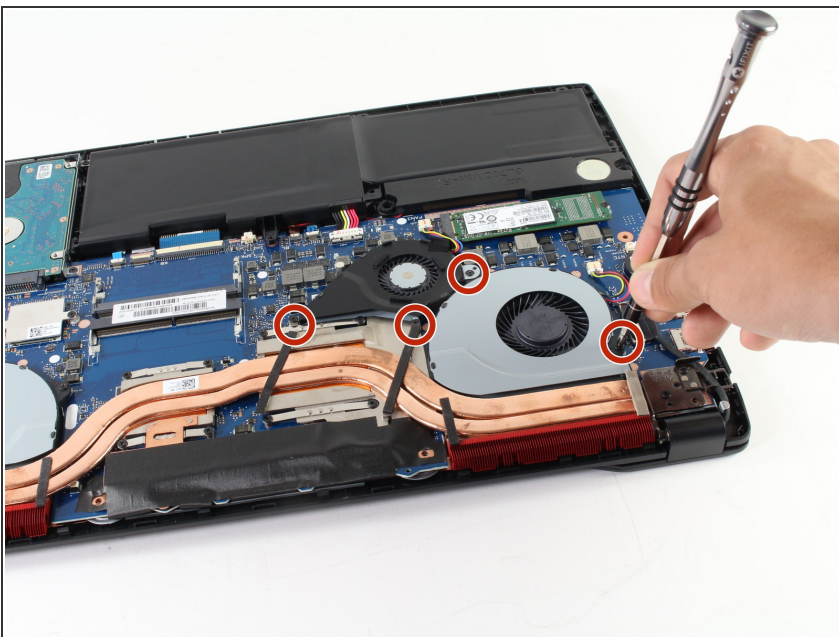


- Using a Phillips #1 screwdriver, remove the four indicated 4 mm screws that hold the black fan and the silver one adjacent to it.

Step 4

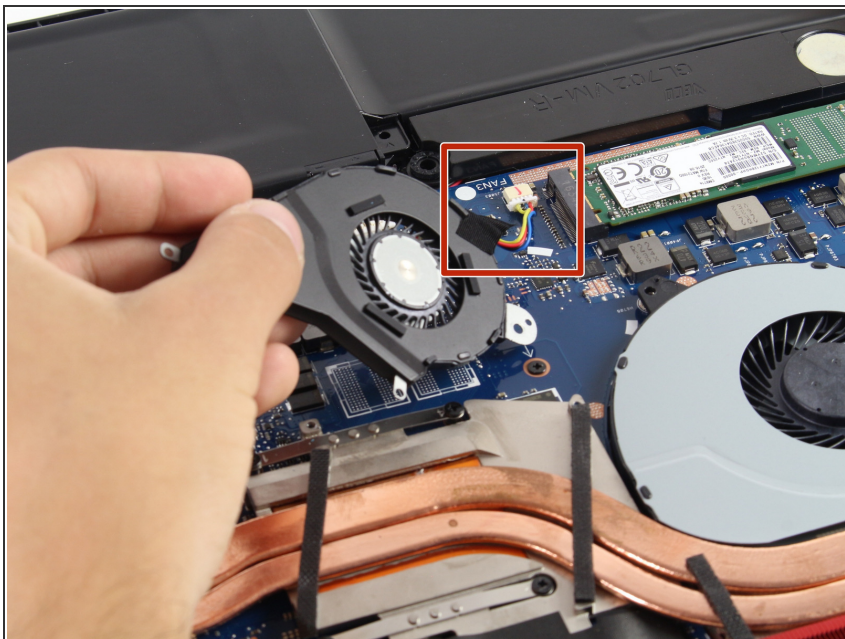

- ❗ The smaller black fan must be removed before the larger gray fan on the right can be taken out.
- To remove the black fan, pull gently on the connecting cables outlined.

Step 5

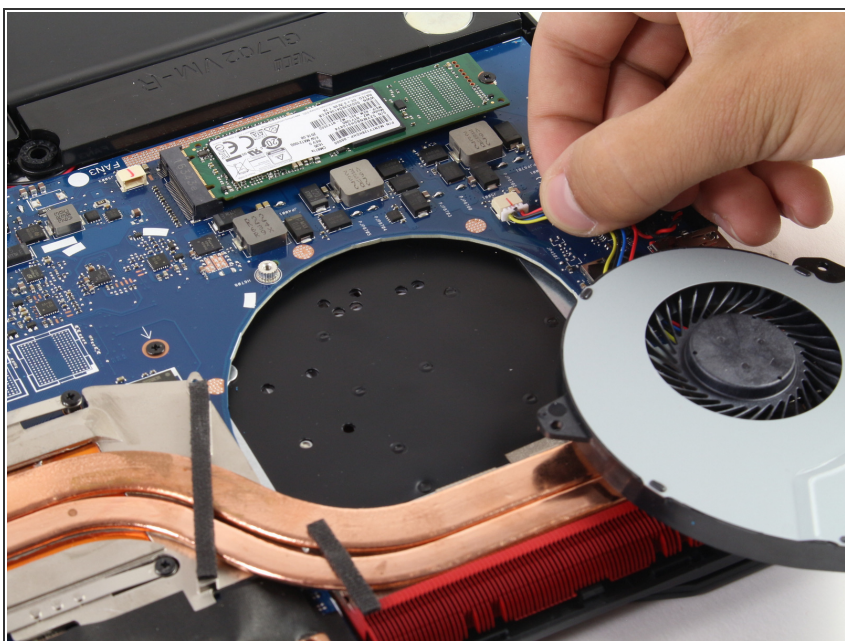


- Unplug the white connector by gently pulling the cables.
- Lift off the gray fan.

Step 6



- Using a Phillips #1 screwdriver, remove the two indicated 4 mm screws from the other gray fan.

Step 7

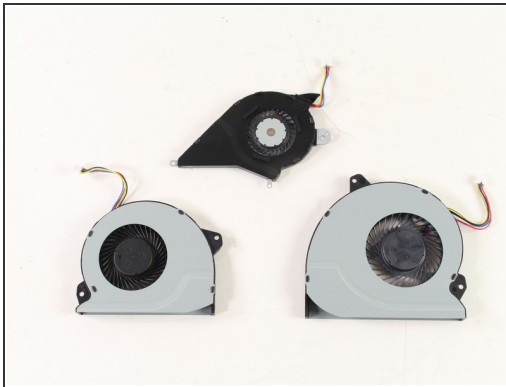

- Unplug the white connector by gently pulling it towards the center of the computer.
- Lift the fan out of the body of the laptop to remove it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 11:08:05 AM.